


Rotastar™

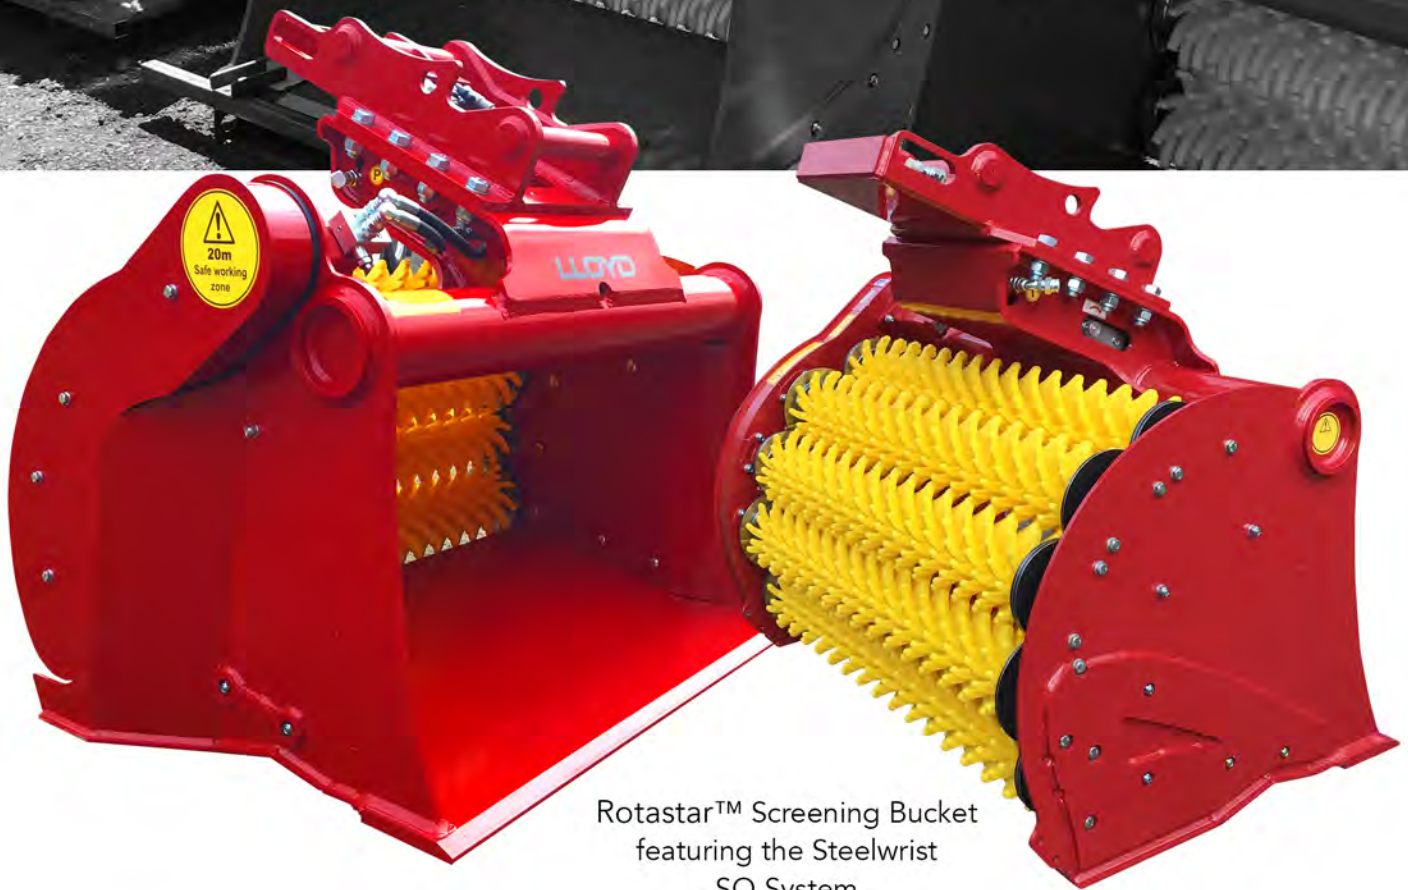

Rotastar™ Screening Bucket
featuring the Steelwrist
SQ System

ROTASTAR™ TECHNICAL SPECIFICATIONS

Model	Carrier Weight (Tons)	Average Tons/Hour	Shafts	Bucket Capacity	Hydraulic Requirements	Bucket Weight	Working Width	Overall Width
RS2-4	2.4 - 4	9	3	0.16 cy	10.57 gpm 70-180 bar	551 lbs	25.19"	35.83"
RS3-5	3.5 - 5.5	11	3	0.20 cy	11.89 gpm 70-180 bar	617 lbs	32.48"	42.13"
RS4-6	4.4 - 6.6	16	3	0.26 cy	13.21 gpm 70-180 bar	750 lbs	41.57"	51.18"
RS4-9	4.4 - 10	27	4	0.39 cy	14.53 gpm 70-180 bar	1014 lbs	41.57"	51.18"
RS8-14	8.8 - 15.5	35	5	0.52 cy	16.92 gpm 70-180 bar	1356 lbs	45.28"	55.20"
RS10-20	11 - 22	44	5	0.85 cy	18.50 gpm 70-180 bar	2337 lbs	49.60"	61.42"
RS13-20	14.3 - 22	60	6	1.18 cy	26.42 gpm 70-180 bar	2756 lbs	49.60"	65.34"
RS20-30	22 - 33	100	8	1.57 cy	37.00 gpm 70-180 bar	3748 lbs	49.60"	65.34"