

IHC - Fixed





IHC compactors

Indeco IHC compactors combine high compaction with fast turnaround times. They are a very efficient replacement both for traditional risky and tiring manual equipment and for self-propelled rollers, which are at great risk of rollover during slope applications.

Compaction is achieved by applying both the dynamic force of a hydraulically-driven vibration system and the static weight of the carrier boom to the thick steel baseplate of the compactor.

Of course, the dynamic forces have to be powerful enough to vibrate the steel baseplate. To enable this to happen, Indeco compactors (mounted straight onto the carrier boom) are hydraulically driven with an oil-bath bearing system, which gives a balanced design of compaction force and vibration speed, so as to achieve the depth penetration needed to reduce air voids and move more material faster. Indeco's fixed IHC hydraulic compactors offer superior efficiency and versatility compared with other products on the market. Being fitted with the same mounting bracket as other Indeco hydraulic equipment makes it easy to switch from one tool to another at the jobsite.

Using just the carrier's hydraulic circuit, they are ideal for compacting backfill for trenches, as well as embankments or other steep slope applications, around foundations or close to other obstacles.

IHC compactors are also perfect for working on grainy, cohesive and semi-cohesive soils with optional adapters on the vibratory plate turning them into highly efficient, pile-driving tools. Robust, versatile and highly productive, IHC compactors have a number of special features created by the technology researchers at Indeco.



Features of Indeco compactors

The system uses oil-bath bearings [1], ensuring maximum reliability, low maintenance costs and high performance, even on the toughest of jobs.

The rubber shock-absorber system [2] is designed to direct the whole force down into the material to be compacted, thus isolating vibrations from the carrier and the operator. The thick chassis and baseplates [3] are made from extra-strength steel alloys which means no flexing or other buckling that could affect performance.


The hydraulic system ^[4] balances force and speed to ensure that the eccentric weights can achieve depth penetration and reduce air voids.

The compactor has been specially designed [5] to work up close to trench walls, foundations, guard rails and other obstacles, along the whole width and length of the job. The pressure- and flow-control valve [6] provides safer, quicker installation, ensuring that incorrect set-ups cannot affect the long-term reliability of the compactor.

The hydraulic connections [7] are located in a practical and functional area in the rear of the compactor.

They run parallel with the carrier hoses, which protects them from accidental breakage, especially in deep narrow pipe trenches.

The motor [8], with its special high-pressure seals, can withstand backpressure without the need for a drain line.

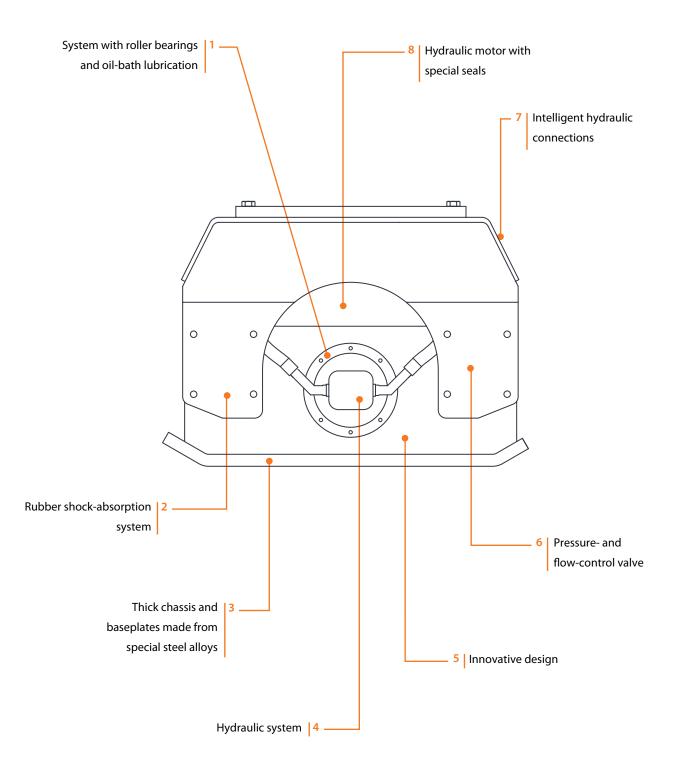



Technical Data	IHC 50	IHC 70	IHC 75
Type of carrier	1 3	1 3	1 3
Excavator weight	3800 ÷ 17600 lbs	7700 ÷ 28600 lbs	8800 ÷ 30800 lbs
Equipment weight*	450 lbs	1000 lbs	1100 lbs
Height	22 in	23.5 in	23.5 in
Baseplate size	12 x 30 in	18 x 33 in	25 x 34 in
Centrifugal force	6600 lbs	8800 lbs	8800 lbs
Compacting force Min - Med - Max Frequency	10.8 16.9 24.2 psi 2000 2500 3000 rpm	11.7 15.6 20 psi 1600 1850 2100 rpm	9.2 12.2 15.7 psi 1600 1850 2100 rpm
Min - Med - Max	33 42 50 hz	27 31 35 hz	27 31 35 hz
Oil flow to motor	12 ÷ 18 gpm	15 ÷ 20 gpm	15 ÷ 20 gpm
Maximum working pressure adjusted to the excavator	3450 psi	2850 psi	2850 psi
Maximum backpressure	100 psi	300 psi	300 psi
Compatibility of attachment plate with mounting bracket	HP 550 HP 1250 HP 1250		HP 1250

*The operating weight of the equipment includes mounting bracket compatible with Indeco construction standards. Any differences in weight may be due to a different mounting bracket configuration.

Carrier key











Compact excavator

Miniloader

Backhoe loader



Tracked excavator



Technical Data	IHC 150	IHC 250
Type of carrier	4 5	4 5
Excavator weight	17600 ÷ 48400 lbs	33000 ÷ 99000 lbs
Equipment weight*	2150 lbs	2850 lbs
Height	31.5 in	31.5 in
Baseplate size	28 x 47 in	35 x 48 in
Centrifugal force	22000 lbs	37400 lbs
Compacting force Min - Med - Max Frequency Min - Med - Max	18.9 22.1 25.6 psi 1800 1950 2100 rpm 30 33 35 hz	17.7 24 31.3 psi 1800 2100 2400 rpm 30 35 40 hz
 Oil flow to motor	27 ÷ 32 gpm	50 ÷ 70 gpm
Maximum working pressure adjusted to the excavator	2850 psi	2450 psi
Maximum backpressure	300 psi	100 psi
Compatibility of attachment plate with mounting bracket	HP 1800 HP 2000	HP 3000 - HP 4000 HP 5000 ÷ HP 7500

N.B. All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

Compatibility

Suggested uses on machines with an overall weight (in lbs):

IHC 50	IHC 70	IHC 75	IHC 150	IHC 250
3800 17600	7700 28600	8800 30800	17600 48400	33000 99000

Accessories

1 Indeconnect system

New remote monitoring system, based on the principles of the Internet of Things, to prevent equipment obsolescence and keep high performance. The **'Indeconnect'** system consists of a **device** equipped with 4G technology for a wireless connection to the network, to be mounted on the equipment, and a cloud-based **web platform** you can access from mobile devices (with an app) or from PC, that lets you view the data transmitted in real time by each installed device: working hours, working position in space, hydraulic oil temperature, ambient temperature, GPS position, and more.

Through Indeconnect you can:

- Monitor productivity, making sure each Indeco tool is working as intended
- Check operations, verifying in real time the various internal and external parameters of the equipment to make sure that it is used in optimal conditions and correctly
- **Increase security**, by remotely checking the position of the equipment through GPS
- Plan maintenance, monitoring the health of each Indeco tool in real time, also through the automatic alert and messaging system that lets you order spare parts and reduce machine downtime to a minimum
- **Optimise rental**, by supervising and monitoring the management of rented equipment.

2 Backfill blade

A useful option, mounted on the compactor, for smoothing and levelling the earth to be compacted, without needing to switch from compactor to bucket.





Application areas

Earth moving works	Trenching	1
	Ground excavation	
	Floor leveling	0
	Soil compaction	0
	Trench compaction	0
Earth Moving and	Loading soil or bulk material	
Construction Foundation works	Building foundation excavation	
	Ground leveling	
Building construction	Foundation pile driving	0
j	Compaction around pillars	0
Tunnelling	Tunnel excavation	
	Roof, face & rib scaling	
Underwater application	Dredging	
	Dock deepening & extension	
Infrastructures	Canal deepening & extension	
	Loading soil or bulk material	
	Handling rock or breakwaters	
Trenching	• Oil & gas, water & sewage	
	(deep trenching)	
	• Trenching	
	 Trench soil compaction 	0
Road construction	Pile driving and guard rail driving	0
	Asphalt repair	0
	Maintenance work (driveways, sidewalks and	
	parking lots)	0
	Block paving	0
Gardening & landscaping	• Fencing	0
	Ground excavation	
	Rock breaking	
	• Pit planting	0
Agriculture and	Stump splitting	
Forestry	Golf course maintenance	
	Root and stump grinding	
	Hedgerow clearance and rejuvenation	
	Grinding of logging residues	
Forestry	Timber log handling	
	 Maintenance of green area, 	
	small trees and brush	
	 Creation and upkeep of woodland corridors and 	
	firebreaks	
	Tree clearing	
	Vegetation clearing	
	Branch clearing	