CRUSHER BUCKET

BF60.1 S4



A

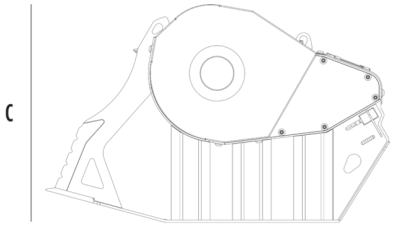

C

B

SPECIFICATIONS

Recommended excavator	ton	10 - 18
Weight	ton	1,65
Load capacity	m^3	0,55
Pressure	bar	220 - 280
Back pressure	bar	< 10
Oil flow rate*	l/min	120 - 150
Crusher mouth width	mm	610
Crusher mouth height	mm	500
Size A	mm	1000
Size B	mm	1745
Size C	mm	1100

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 V Iron Separator	24 Month Warranty

APPLICATION AREAS

- Demolitions and Renovations
- Road works and Infrastructures
- Quarries and Mines
- Enclosed Spaces
- Urban Construction Sites
- Remote Areas and Complex Logistics
- Pipelines
- Inert materials recycling and Waste management
- Foundries
- Agriculture and Landscaping
- Forest maintenance

EN

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.

MBCRUSHER.COM

Rev. 20261002