## CRUSHER BUCKET

# MB-C50 S4

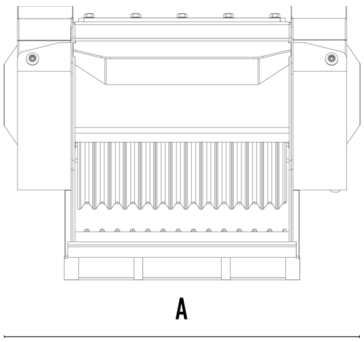


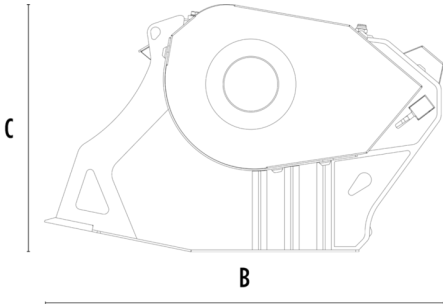

## SPECIFICATIONS

| | | |
|---|---|---|
| Recommended excavator | ton | 6,5 - 10 |
| Recommended backhoe loader | ton | 8 - 9* |
| Weight | ton | 0,75 |
| Load capacity | m³ | 0,15 |
| Pressure | bar | 200 - 250 |
| Back pressure | bar | < 10 |
| Oil flow rate** | l/min | 90 - 120 |
| Crusher mouth width | mm | 590 |
| Crusher mouth height | mm | 280 |
| Size A | mm | 1000 |
| Size B | mm | 1240 |
| Size C | mm | 770 |

* Only compatible with the posterior boom of a Backhoe.
** The minimum hydraulic flow rate value must be alongside the required operating pressure.

## OPTIONAL ACCESSORIES

- Dust suppression kit
- Hour meter
- 24 Month Warranty

## APPLICATION AREAS

- Demolitions and Renovations
- Enclosed Spaces
- Urban Construction Sites
- Pipelines
- Agriculture and Landscaping

EN

The data and images provided above are not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice. It is the responsibility of the installer to verify the suitability of the carrier machine with regard to the weight and specifications of the attachment.